

# Mycelx Hydrocarbon Removal Pad

The Mycelx Versipad™ is an oil absorbent pad that can be unfolded to nine times the area of a standard melt blown polypropylene pad. Each Versipad™ is able to remove oil on surface areas up to 18.2 ft<sup>2</sup> with no use of additional materials. The Versipad™ immediate absorption speed and minimal water drag out make it highly efficient for cleaning up contaminated areas. Unfoldability allow the Versipad™ to be used by 100% of its sorption capacity vs. Only 7% for standard MBPP pads.

## Benefits

- Use of fewer pads reduces material usage
- Reduced waste generation
- Prevents weathering and separation on contact
- Versipad™ is triboelectrically inactive and will not generate static charge
- Environmentally safe

## Usage Directions

1. Place Versipad™ over contaminated area. If desired, Versipad™ can be unfolded to cover large areas on tanks and in calm weather conditions.
2. Allow oil to absorb into Versipad™
3. Remove and replace Versipad™ when fully saturated

## Tank Cleaning, Light Oil Films, and Spotty Water



1. Unfold Versipad™ the required amount to totally cover the tank surface
2. Lay Versipad™ on top of oily water
3. The oil absorbs immediately. Lift oil soaked pad from surface

## Bulk Light and Medium Sorption

1. For bulk absorption of oil leave the Versipad™ folded for maximum absorption
2. Allow oil to fully saturate pad
3. Remove pad and replace if required

## Land Applications

1. Place under and around dripping machinery to catch oil leakage
2. Unfold pads once or twice to form a strip that can be used to fold around corners

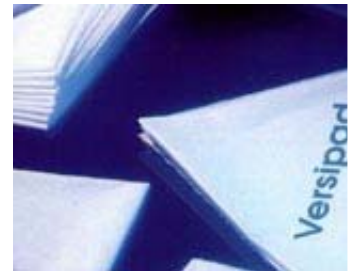

**Head Office:**  
6120 Davies Road  
Edmonton, AB  
T6E 4M9

Phone: (780) 485-2010 • Toll Free: (866) 707-7867  
Fax: (780) 485-1938  
• Calgary • Drayton Valley • Lethbridge  
[www.rotatingright.com](http://www.rotatingright.com)